





HOLLOW TYPE IRON POWDER CORES

(1) CODING CODE



(2) SHAPE

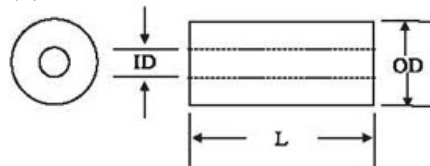

TYPE	OD	ID	L
YH7.95-40 core	.312/7.95	.137/3.48	.750/19.1
YH12.7-40 core	.500/12.7	.172/4.37	.688/17.5
YH12.7-40A core	.500/12.7	.172/4.37	1.064/27.0
YH12.7-40B core	.500/12.7	.172/4.37	1.375/34.9
YH15.9-40 core	.625/15.9	.219/5.56	.900/22.9
YH15.9-40A core	.625/15.9	.219/5.56	.955/24.3
YH15.9-40B core	.625/15.9	.219/5.56	1.250/31.8
YH15.9-40C core	.625/15.9	.219/5.56	1.330/33.8
YH19.1-40 core	.750/19.1	.260/6.60	1.080/27.4
YH19.1-40A core	.750/19.1	.260/6.60	1.500/38.1
YH19.1-40B core	.750/19.1	.260/6.60	1.580/40.1
YH25.4-40 core	1.000/25.4	.250/6.35	1.000/25.4
YH22-1002 core	.144/3.66	.064/1.63	.125/3.17
YH22-1006 core	.144/3.66	.064/1.63	.125/3.17
YH46-1002 core	.263/6.68	.075/1.90	.394/10.0
YH46-1006 core	.263/6.68	.075/1.90	.394/10.0
YH520-1002 core	.312/7.92	.137/3.48	1.250/31.8
YH68-1002 core	.375/9.53	.125/3.17	.500/12.7
YH68-1003 core	.375/9.53	.125/3.17	.500/12.7
YH68-1006 core	.375/9.53	.125/3.17	.500/12.7
YH68-1010 core	.375/9.53	.125/3.17	.500/12.7
YH68-1242 core	.375/9.53	.205/5.21	.500/12.7
YH610-1003 core	.375/9.53	.125/3.17	.625/15.9
YH610-1102 core	.364/9.25	.125/3.17	.625/15.9
YH610-1103 core	.364/9.25	.125/3.17	.625/15.9
YH610-1107 core	.364/9.25	.125/3.17	.625/15.9
YH616-1002 core	.375/9.53	.125/3.17	1.000/25.4
YH616-1202 core	.368/9.35	.201/5.11	1.000/25.4
YH616-1301 core	.375/9.53	.137/3.48	1.000/25.4
YH616-1302 core	.375/9.53	.137/3.48	1.000/25.4
YH618-1042 core	.375/9.53	.125/3.17	1.125/28.6
YH620-1002 core	.375/9.53	.137/3.48	1.250/31.8
YH810-1007 core	.500/12.7	.200/5.08	.625/15.9
YH818-1003 core	.500/12.7	.200/5.08	1.125/28.6
YH918-1002 core	.570/14.5	.250/6.35	1.125/28.6
YH918-1006 core	.570/14.5	.250/6.35	1.125/28.6
YH918-1008 core	.570/14.5	.250/6.35	1.125/28.6
YH918-1010 core	.570/14.5	.245/6.22	1.125/28.6
YH1020-1002 core	.625/15.9	.219/5.56	1.250/31.8
YH1224-1002 core	.750/19.1	.260/6.60	1.500/38.1
YH1614-1002 core	1.000/25.4	.250/6.35	.875/22.2
YH1616-1102 core	.950/24.1	.189/4.80	1.000/25.4

SIZE TOLERANCE(mm)

TYPE	OD	ID	L
YH7.95-YH25.4	+0.00 -0.10	+0.10 -0.00	±0.25