



**YUXIANG**

www.magnet-tech.com

## R TYPE

(1) ORDERING CODE

R120 R 1.65 × 14 (R)


Material Type Outside Diameter(A ) Length(D) Gridding

**Fixed inductors**

Materials can be Changed according to your request



(2) SHAPE

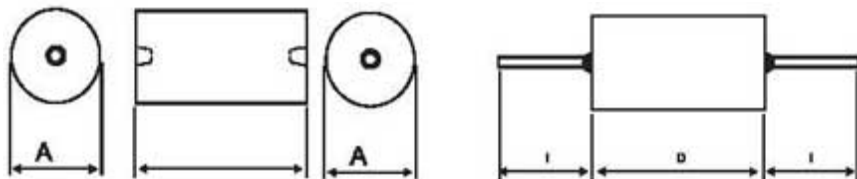

## (3)DIMENSIONS

NO.	TYPE	Dimensions(mm)		NO.	CORE	Dimensions(mm)	
		A	D			A	D
1	R1.2×4.5	1.20 ±0.10	4.50 ±0.20	23	R6×25	6.00 ±0.20	25.0 ±0.50
2	R1.5×5	1.50 ±0.10	5.00 ±0.20	24	R6×30	6.00 ±0.20	30.0 ±0.50
3	R1.9×6.5	1.90 ±0.10	6.50 ±0.20	25	R6×38	6.00 ±0.20	38.0 ±0.60
4	R1.65×14(R)	1.65 ±0.10	14.0 ±0.30	26	R6.35×19.5	6.35 ±0.20	19.5 ±0.30
5	R1.85×7.7	1.85 ±0.10	7.70 ±0.20	27	R6.35×30	6.35 ±0.20	30.0 ±0.50
6	R2×14	2.00 ±0.10	14.0 ±0.30	28	R6.5×38	6.50 ±0.20	38.0 ±0.60
7	R2.6×20	2.60 ±0.10	20.0 ±0.40	29	R7×20	7.00 ±0.20	20.0 ±0.40
8	R3×15	3.00 ±0.10	15.0 ±0.30	30	R7×38	7.00 ±0.20	38.0 ±0.60
9	R3×25(R)	3.00 ±0.10	25.0 ±0.50	31	R8×18.5	8.00 ±0.20	18.5 ±0.30
10	R3.3×17.5	3.30 ±0.10	17.5 ±0.30	32	R8×20	8.00 ±0.20	20.0 ±0.40
11	R3.5×25	3.50 ±0.10	25.0 ±0.50	33	R8×32	8.00 ±0.20	32.0 ±0.60
12	R4×15	4.00 ±0.20	15.0 ±0.30	34	R9.5×22.5	9.50 ±0.20	22.5 ±0.40
13	R4×19	4.00 ±0.20	19.0 ±0.30	35	R10×15	10.0 ±0.30	15.0 ±0.30
14	R4.4×20	4.40 ±0.20	20.0 ±0.40	36	R10×25	10.0 ±0.30	25.0 ±0.50
15	R5×18	5.00 ±0.20	18.0 ±0.30	37	R10×30	10.0 ±0.30	30.0 ±0.50
16	R5×25	5.00 ±0.20	25.0 ±0.50	38	R10×38	10.0 ±0.30	38.0 ±0.60
17	R5×30	5.00 ±0.20	30.0 ±0.50	39	R12×25	12.0 ±0.30	25.0 ±0.50
18	R5.5×15	5.50 ±0.20	15.0 ±0.30	40	R16×12	16.0 ±0.30	12.0 ±0.30
19	R5.5×21	5.50 ±0.20	21.0 ±0.40	41	R19×20	19.0 ±0.30	20.0 ±0.40
20	R5.85×18	5.85 ±0.20	18.0 ±0.30	42	R20×25	20.0 ±0.30	25.0 ±0.50
21	R6×15	6.00 ±0.20	15.0 ±0.30	43	R21×27	21.0 ±0.40	27.0 ±0.60
22	R6×20	6.00 ±0.20	20.0 ±0.40	44	R21×40	21.0 ±0.40	40.0 ±0.60

Copyright 2005 YUXIANG Magnetic Materials Ind. Co.,Ltd.All Rights Reserved.

Add: 16F1,jinyuan building,NO.57,hubin S.Rd.,Xiamen,China.361004

Tel : (86)592 2225286 (86)592 2219816 (86)592 2217138 Fax: (86)592 2207122

Email : magnetcom@gmail.com sales@magnet-tech.com