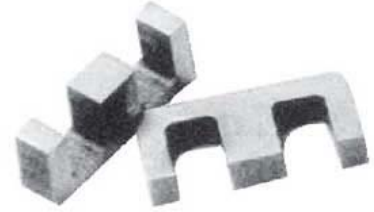



E TYPE IRON POWDER CORE
(1) ORDING CODE

YE	13	75	A
----	----	----	---

Shape Dimension code Material Dimension difference

(2) SHAPE


TYPE	Al	A	B	C	D	F	G	le	Ae	V	W
YE13-35 core	20.5	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
YE13-55 core	29.0	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
YE13-75 core	38.0	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
YE13-75A core	38.0	12.7	11.1	3.18	7.93	3.18	9.53	2.86	.101	.288	.252
YE16-35 core	30.5	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
YE16-75 core	58.0	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
YE16-60 core	51.0	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
YE16-75A core	56.0	16.4	16.3	4.62	12.0	4.62	11.3	3.98	.224	.861	.399
YE19-35 core	33.5	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
YE19-75 core	64.0	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
YE19-22 core	27.5	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
YE19-60 core	55.0	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
YE19-75A core	59.0	19.1	16.1	4.75	11.6	4.75	14.3	4.20	.226	.936	.551
YE20-75 core	49.0	20.1	22.5	3.56	16.1	6.35	13.9	5.24	.225	1.18	.605
YE20-35A core	38.0	20.2	19.9	5.84	14.0	5.84	14.6	4.84	.333	1.63	6.13
YE20-75A core	73.0	20.2	19.9	5.84	14.0	5.84	14.6	4.84	.333	1.63	6.13
YE20-75B core	73.0	20.2	19.9	5.84	14.0	5.84	14.6	4.84	.333	1.63	6.13
YE25-35 core	51.0	25.4	25.4	7.29	17.5	7.29	17.7	6.08	.548	3.38	.908
YE25-75 core	96.0	25.4	25.4	7.29	17.5	7.29	17.7	6.08	.548	3.38	.908
YE25-75A core	96.0	25.4	25.4	7.29	17.5	7.29	17.7	6.08	.548	3.38	.908
YE25-35A core	48.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
YE25-55A core	65.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
YE25-75A core	92.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
YE25-60A core	81.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
YE25-75AA core	85.0	25.4	19.1	6.35	12.7	6.35	19.1	5.08	.403	2.05	.806
YE26-35 core	116.0	25.9	19.1	14.1	8.89	6.35	19.4	3.93	.895	2.36	.581
YE30-75 core	90.0	30.1	30.1	7.06	19.9	7.06	19.9	7.14	.498	4.60	1.27
YE30-60 core	80.0	30.1	30.1	7.06	19.9	7.06	19.9	7.14	.498	4.60	1.27
YE30-75A core	90.0	30.1	30.1	7.06	19.9	7.06	19.9	7.14	.498	4.60	1.27
YE32-75 core	134.0	31.8	30.8	9.60	21.2	9.60	22.5	7.45	.922	6.82	1.37
YE32-33 core	63.5	31.8	30.8	9.60	21.2	9.60	22.5	7.45	.922	6.82	1.37
YE32-60 core	113.0	31.8	30.8	9.60	21.2	9.60	22.5	7.45	.922	6.82	1.37
YE35-35 core	67.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55
YE35-55 core	100.0	34.9	29.1	9.53	19.6	9.53	25.4	7.40	.907	6.72	1.55

>>next

Copyright 2005 YUXIANG Magnetic Materials Ind. Co.,Ltd.All Rights Reserved.

Add: 16F1,jinyuan building,NO.57,hubin S.Rd.,Xiamen,China.361004

Tel : (86)592 2225286 (86)592 2219816 (86)592 2217138 Fax: (86)592 2207122

Email : magnetcom@gmail.com sales@magnet-tech.com